

Date: _____

Type: _____

Project: _____

AQUIL BOLLARD

Introducing one of our modern sleek 28-inch bollard. This one belongs to the smaller-sized group of bollards featuring an inverted L-shaped profile with smooth, sharp corners, exuding simplicity and sophistication. It's an attractive addition to any outdoor space. Plus, you have the option to customize with a double head assembly – the twin version. Don't forget to explore different wood finishing and print designs that can be applied to this bollard. It will give your choice finishing a unique and attractive look.

Construction: Discover our carefully crafted standard 28-inch bollard, expertly fashioned from durable aluminum extrusion.

Mounting: The fixture attaches securely to the ground and anchoring plate using two flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Its clear lens enhances the direct downward illumination creating a warm and inviting ambiance.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Type II (std), Type III, Type IV

Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10v dimming, ground fault receptacle, button photocell (voltage specific), base cover


Finish: black, white, silver grey, bronze, custom color available upon request, contact factory for different wood designs and print options

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty



AQUIL:

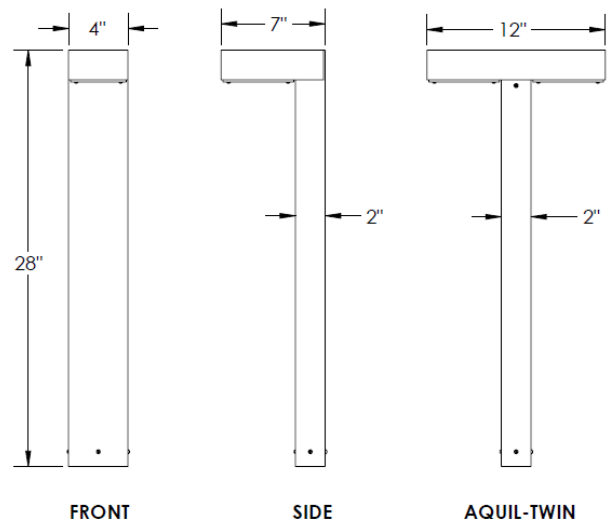

Anchoring Details:



Anchorbolt Size: 3/8" X 8" X 1"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine (per head)	Electrical	Color Temperature	Mounting	Lens	Light Pattern	Options	Finish
AQUIL	28"	10W	UNV	3000K	ABT	CL	TY2	TP	BL
AQUIL-TWIN			HLV	3500K			TY3	TS	BZ
				4000K			TY4	DM	WH
				5000K				GFR	SG
								PC	CC
								BC	WOOD
Custom wattage and size available									

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- AQUIL-TWIN – Double head assembly (contact Solera)
- UNV – Universal voltage (120-277V)
- HLV – 347V line voltage
- ABT – Anchor, bolts, & template
- CL – Clear lens (std)
- TY2 – Type II distribution (std)
- TY3 – Type III distribution
- TY4 – Type IV distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V dimming
- GFR – Ground fault receptacle
- BC – Base cover
- PC – Button photocell (voltage specific)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- WOOD – Contact factory for wood and any other print design options