

Date: _____

Type: _____

Project: _____

KIA WALL MOUNT

Introducing KIA, our sleek wall luminaire made from combination of extruded aluminum and acrylic materials. KIA is a statement fixture that has a cylindrical body with solid metal pieces on both ends. Designed to give exterior spaces that comfortable inviting look with its subtle glow, the flat-end design is our standard offering. Contact factory if you plan to use this design for indoor application.

Construction: Crafted from durable aluminum extrusion and high impact acrylic lens. This elegant decorative wall mount has a slim 3-inch diameter available in two lengths to suit a variety of lighting applications. Weatherproof silicone gasket seal and stainless-steel external hardware provide reliable all-weather protection while enhancing durability and corrosion resistance.

Mounting: Mounts over standard J-Box

Lens: See your surroundings with our standard high impact UV stabilized opal acrylic lens! Frosted lens is an option.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature, CRI 80

Driver: 60Hz, 120-277V/347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10V 10% dimming, tamperproof hardware, tamperproof bits


Finish: black, bronze, silver gray, white, custom color, hydro-dipped finish available upon request

Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty



KIA:

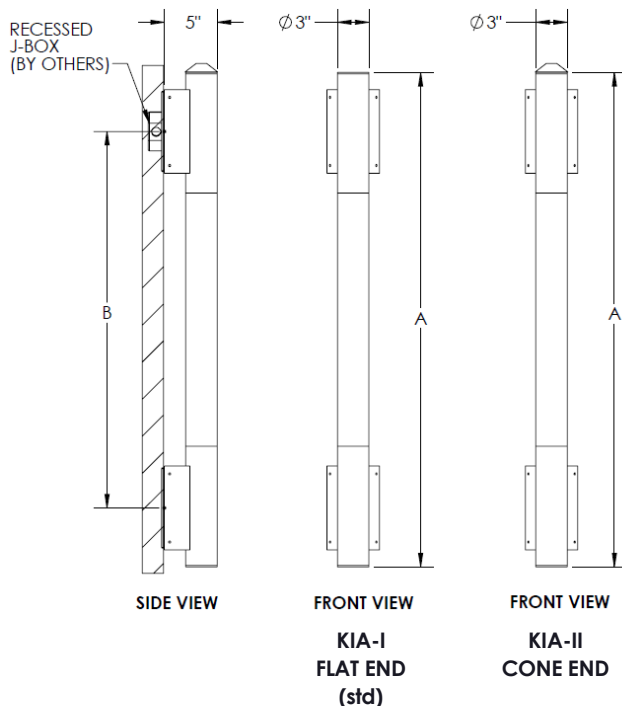

PRODUCT		A	B
KIA-I-48	KIA-II-48	48"	36"
KIA-I-72	KIA-II-72	72"	60"

--	--	--	--	--	--	--	--	--

Name	Available Size	Light Engine (maximum)	Electrical	Color Temperature	Mounting	Lens	Options	Finish
KIA-I (FLAT END) STANDARD	48"	18W LED	UNV	3000K	WM	OAL	DM	BL
KIA-II (CONE END)	72"	36W LED	347V	3500K		FL	TP	BZ
				4000K			TS	SG
				5000K				WH
custom wattage and size available								CC
								H-DIP

Notes:

- 3000K – 156 lm/w
- 3500K – 159 lm/w
- 4000K – 164 lm/w
- 5000K – 166 lm/w
- KIA-I – Flat end design is the standard offering (std)
- KIA-II – Cone end design
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- WM – Wall mounted
- OAL – Opal lens (std)
- FL – Frosted lens
- DM – 0-10V 10% dimming
- TP – Tamperproof hardware
- TS – Tamperproof bits
- BL – Minitex black
- BZ – Minitex bronze
- SG – Minitex silver gray
- WH – Minitex white
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)