

Date: _____

Type: _____

Project: _____

LUMI WALL MOUNT

LUMI Wall Mount is a decorative piece with indirect illumination. Made from extruded aluminum with smooth, solid curved front design. Its slim profile and unique dimensions provide stylish and attractive addition to any area lighting. It features an opal cylindrical lens sitting behind the curved front solid shield.

Construction: Carefully crafted using aluminum alloy seamlessly finished showing smooth surface. Its stainless-steel external hardware and all-weather silicon gasket seal ensures corrosion resistance and durability to guarantee long-lasting performance.

Mounting: The fixture housing mounts over octagonal J-box with four wall-mounting screws.

Lens: opal tube lens

Light distribution: back glow

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance 3000K, 3500K, 4000K, 5000K

Driver: 60Hz, 120-277V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10v dimming, voltage-specific button photocell, tamperproof hardware, tamperproof bits, wet location


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor and outdoor location

Warranty: 5-year limited warranty




LUMI:

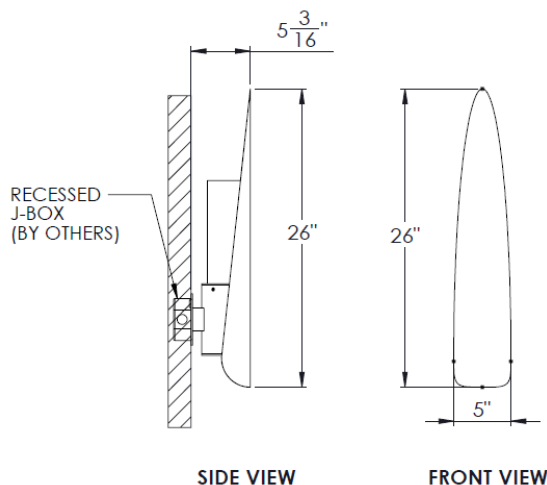

SIDE VIEW

FRONT VIEW



ISOMETRIC VIEW



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
LUMI	12W LED	3000K	UNV	WM	OPL	BG	DM	BL
		3500K					PC	BZ
		4000K					TP	SG
		5000K					TS	WH
		custom wattage available					WL	CC
								H-DIP

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- WM – Wall mounted
- OPL – Opal tube lens
- BG – Back glow
- DM – 0-10V dimming
- PC – Button photocell, voltage-specific
- TP – Tamperproof hardware
- TS – Tamperproof bits
- WL – Wet location
- BL – Minitex black
- BZ – Minitex bronze
- SG – Minitex silver gray
- WH – Minitex white
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)